


## TECHNICAL DATA SHEET

ENG-AU-BLA-180CB

### SIGNATURE AUSTRALIAN RANGE: BLACKBUTT CHARACTER SATIN

#### PRODUCT SPECIFICATIONS

|               |                                                                                                          |
|---------------|----------------------------------------------------------------------------------------------------------|
| PRODUCT RANGE | SIGNATURE AUSTRALIAN RANGE                                                                               |
| COLOUR        | BLACKBUTT                                                                                                |
| PRODUCT CODE  | ENG-AU-BLA-180CB                                                                                         |
| CONSTRUCTION  | MULTI-LAYERED ENGINEERED                                                                                 |
| BACKING       | EUCALYPTUS PLYWOOD                                                                                       |
| GRADE         | CHARACTER                                                                                                |
| PATTERN       | 1 STRIP                                                                                                  |
| BOX SIZE      | VARIES WITH BATCH                                                                                        |
| EDGE          | BEVEL                                                                                                    |
| PROFILE       | TONGUE AND GROOVE                                                                                        |
| FINISH        | LACQUER                                                                                                  |
| TOP LAYER     | 3mm BLACKBUTT LAMELLA                                                                                    |
| THICKNESS     | 14mm                                                                                                     |
| WIDTH (mm)    | 180                                                                                                      |
| LENGTH        | 1900mm (Product contains split lengths, with up to 25% shorter boards. These may be half or 1/3 lengths) |

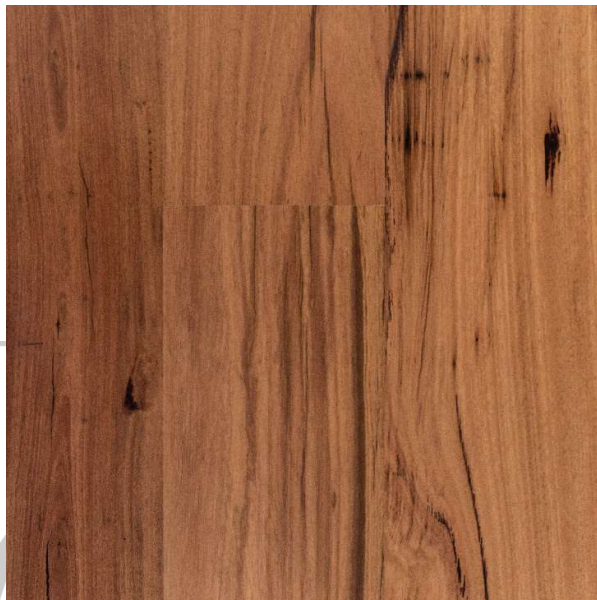

The photograph used in this sheet is intended as an illustration. It does not provide any indication of grading. Colours will vary between batches in stock.

#### INSTALLATION METHODS

|                         |                      |
|-------------------------|----------------------|
| DIRECT STICK            | YES                  |
| FLOATING ON UNDERLAY    | YES                  |
| OVER UNDERFLOOR HEATING | YES WITH LIMITATIONS |

#### WARRANTY

|             |                     |
|-------------|---------------------|
| RESIDENTIAL | LIFETIME STRUCTURAL |
| COMMERCIAL  | 10 YEARS STRUCTURAL |

#### AUSTRALIAN STANDARDS

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| ACOUSTIC RATING                                  | DEPENDENT ON UNDERLAY |
| SLIP RATING AS 4586-2013                         | P2                    |
| FORMELDELHYDE RATING                             | E1                    |
| CRITICAL HEAT FLUX (CHF) MEAN AS/ISO 9239.1-2003 | 3.2 kW/m <sup>2</sup> |
| JANKA HARDNESS RATING                            | 9.1kN                 |

